


Round ends with key lock, 72 mm centre, 24 mm forend

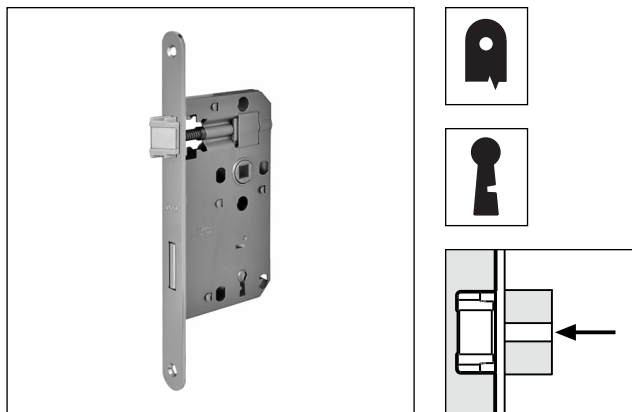

Description

Embedded lock with latch and bolt. 72 mm centre. 24 mm forend with round ends. Single 55 mm backset and 4 mixed codes. Made entirely of steel with patented co-moulded self-lubricating latch and steel bolt. Reversible latch. Case with holes for handle installation using through screws.


Use

For interior timber doors.


Fastening

Prepare cutout and mill the panel according to the dimensions shown in the diagram. Secure the lock with two 4,5x25 mm screws. To reverse the spring latch, push it out of the forend by pushing with a screwdriver against the screw on the back, then rotate it.

Note. Each lock comes with a key. Special packagings with only one key differ inside are available on request for industrial applications. The striker, selected according to the construction type, must be ordered separately.

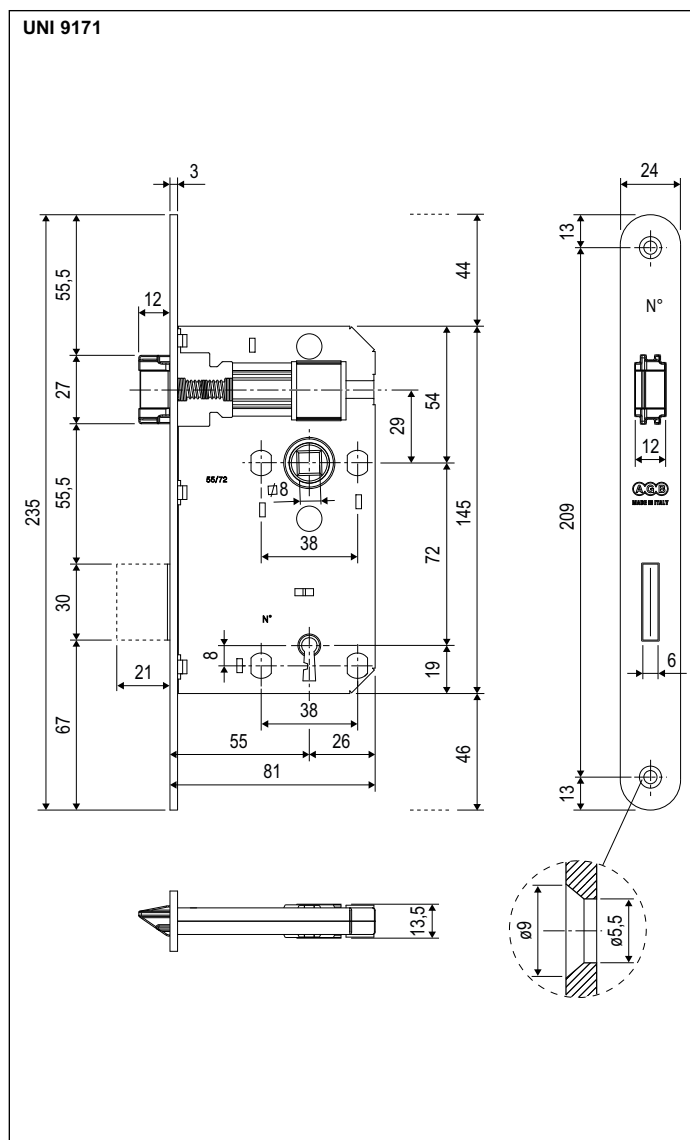

Order Specifications

| Material | SALES CODE | | |  |
|----------|------------|---------|-------------|---|
| | Ref. | Backset | Finish code | |
| STEEL | B10073 | 55 | XX | 4 |

Note. Refer to the price list in force to check the availability of the finishes.