

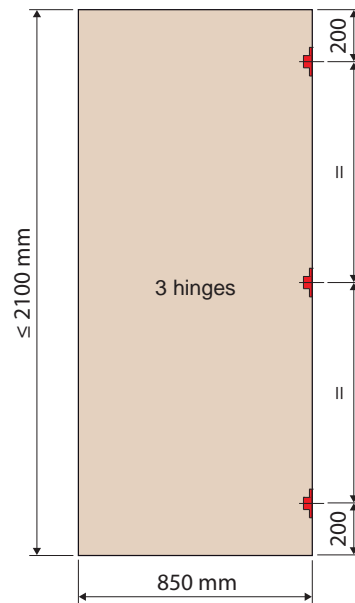
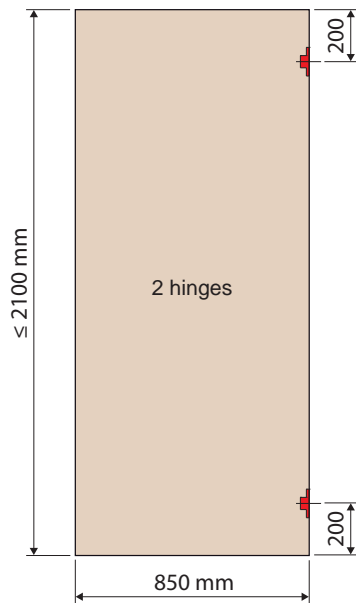


Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors

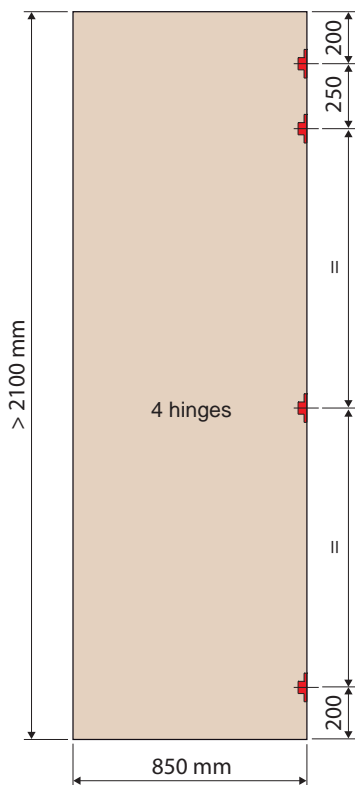

Note. Two hinges capacity is 40 kg and three hinges capacity is 60 kg, in any case if the door is higher than 1600 mm we suggest you a third hinge in the central position to reduce deformations. For the number of hinges to use, please make reference to the application fields at www.agb.it.

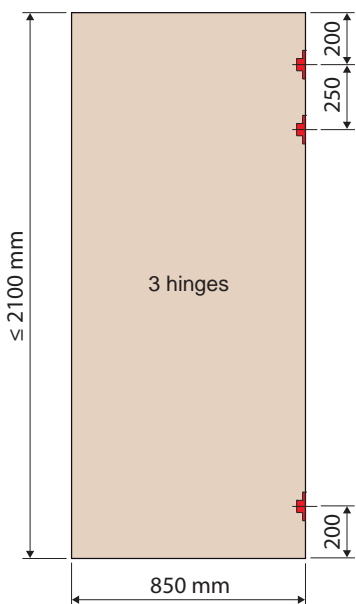

Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors

Sash weight = 12 kg/m²

Thickness of the glass: 5 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2	2	2	2							
700	2	2	2	2	2	2	2	2	2	2	2	2				
800	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
900	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1000	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1100	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1200	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1300	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1400	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1500	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1600	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1700	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1800	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1900	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2000	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2100	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2200	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2300	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2400	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2500	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2600	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2700	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2800	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4

Sash weight = 16 kg/m²

Thickness of the glass: 6,5 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2	2	2	2							
700	2	2	2	2	2	2	2	2	2	2	2	2				
800	2	2	2	2	2	2	2	2	2	2	2	2	2			
900	2	2	2	2	2	2	2	2	2	2	2	2	2			
1000	2	2	2	2	2	2	2	2	2	2	2	2	2			
1100	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
1200	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
1300	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
1400	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
1500	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
1600	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1700	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1800	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
1900	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2000	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2100	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2200	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
2300	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2400	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2500	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2600	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2700	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2800	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4

Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors

Sash weight = 20 kg/m²

Thickness of the glass: 12 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2	2	2	2							
700	2	2	2	2	2	2	2	2	2	2						
800	2	2	2	2	2	2	2	2	2	2						
900	2	2	2	2	2	2	2	2	2	2	2					
1000	2	2	2	2	2	2	2	2	2	2	2					
1100	2	2	2	2	2	2	2	2	2	2	2					
1200	2	2	2	2	2	2	2	2	2	2	2	2				
1300	2	2	2	2	2	2	2	2	2	2	2	2				
1400	2	2	2	2	2	2	2	2	2	2	2	2				
1500	2	2	2	2	2	2	2	2	2	2	2	2				
1600	3	3	3	3	3	3	3	3	3	3	3	3	3	3		
1700	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
1800	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
1900	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
2000	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
2100	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
2200	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
2300	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2400	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2500	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2600	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2700	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2800	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4

Sash weight = 30 kg/m²

Thickness of the glass: 12 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2										
700	2	2	2	2	2	2	2									
800	2	2	2	2	2	2	2									
900	2	2	2	2	2	2	2									
1000	2	2	2	2	2	2	2	2								
1100	2	2	2	2	2	2	2	2								
1200	2	2	2	2	2	2	2	2								
1300	2	2	2	2	2	2	2	2								
1400	2	2	2	2	2	2	2	2								
1500	2	2	2	2	2	2	2	2								
1600	3	3	3	3	3	3	3	3	3	3						
1700	3	3	3	3	3	3	3	3	3	3						
1800	3	3	3	3	3	3	3	3	3	3						
1900	3	3	3	3	3	3	3	3	3	3						
2000	3	3	3	3	3	3	3	3	3	3						
2100	3	3	3	3	3	3	3	3	3							
2200	3	3	3	3	3	3	3	3								
2300	4	4	4	4	4	4	4	4	4	4	4					
2400	4	4	4	4	4	4	4	4	4	4	4					
2500	4	4	4	4	4	4	4	4	4	4	4					
2600	4	4	4	4	4	4	4	4	4	4	4					
2700	4	4	4	4	4	4	4	4	4	4						
2800	4	4	4	4	4	4	4	4	4							

Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors

Sash weight = 40 kg/m²

Thickness of the glass: 16 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2												
700	2	2	2	2	2											
800	2	2	2	2	2											
900	2	2	2	2	2											
1000	2	2	2	2	2											
1100	2	2	2	2	2	2										
1200	2	2	2	2	2	2										
1300	2	2	2	2	2	2										
1400	2	2	2	2	2	2										
1500	2	2	2	2	2											
1600	3	3	3	3	3	3	3									
1700	3	3	3	3	3	3	3	3								
1800	3	3	3	3	3	3	3	3								
1900	3	3	3	3	3	3	3									
2000	3	3	3	3	3											
2100	3	3	3	3	3											
2200	3	3	3	3												
2300	4	4	4	4	4	4	4	4								
2400	4	4	4	4	4	4	4	4								
2500	4	4	4	4	4	4										
2600	4	4	4	4	4	4										
2700	4	4	4	4	4											
2800	4	4	4	4	4											

Sash weight = 50 kg/m²

Thickness of the glass: 20 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2													
700	2	2	2													
800	2	2	2	2												
900	2	2	2	2												
1000	2	2	2	2												
1100	2	2	2	2												
1200	2	2	2	2												
1300	2	2	2	2												
1400	2	2	2													
1500	2	2	2													
1600	3	3	3	3	3											
1700	3	3	3	3	3											
1800	3	3	3	3												
1900	3	3	3													
2000	3	3	3													
2100	3	3	3													
2200	3	3														
2300	4	4	4	4	4											
2400	4	4	4	4	4											
2500	4	4	4													
2600	4	4	4													
2700	4	4	4													
2800	4	4	4													