Scivola Tre Class - 16 mm forend, key

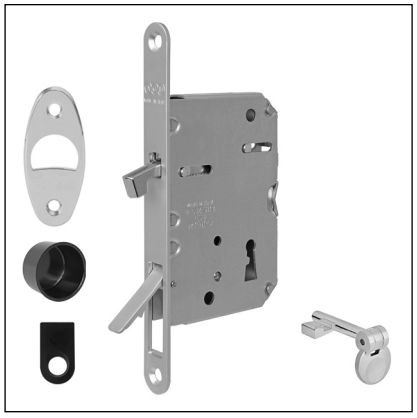



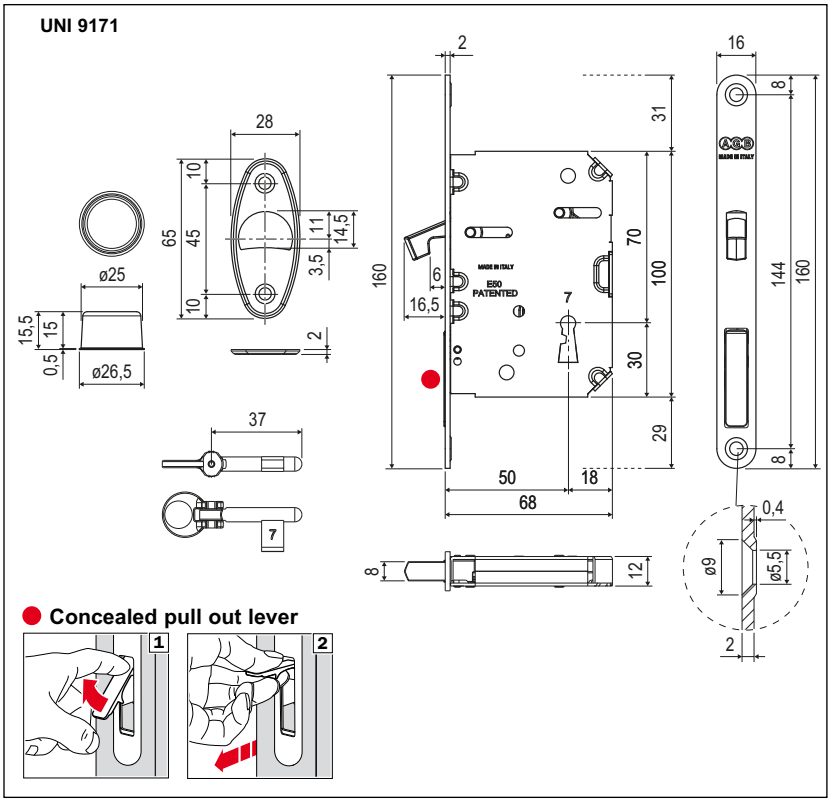

Use

The hub of the handle operates the hook which can be locked by the key.
To make the sash sliding, use the pull out lever placed in the lock forend.
The ergonomic grip allows to overpass the resistance of the systems regarding the brake of sliding doors.

Fastening

Fasten the lock and striker with 4 screws 4x20 mm.

Covering plate, 0,3 mm thickness:
B08999.02.93

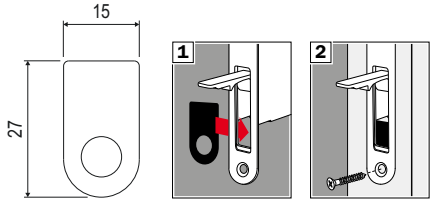

Order Specifications

Material	Article	
STEEL	B08980.50.XX	1

Order Specifications - key with reduced neck

Material	Article	
STEEL	B08983.50.XX	1

Note. *Refer to the price list in force to check the availability of the finishes.*
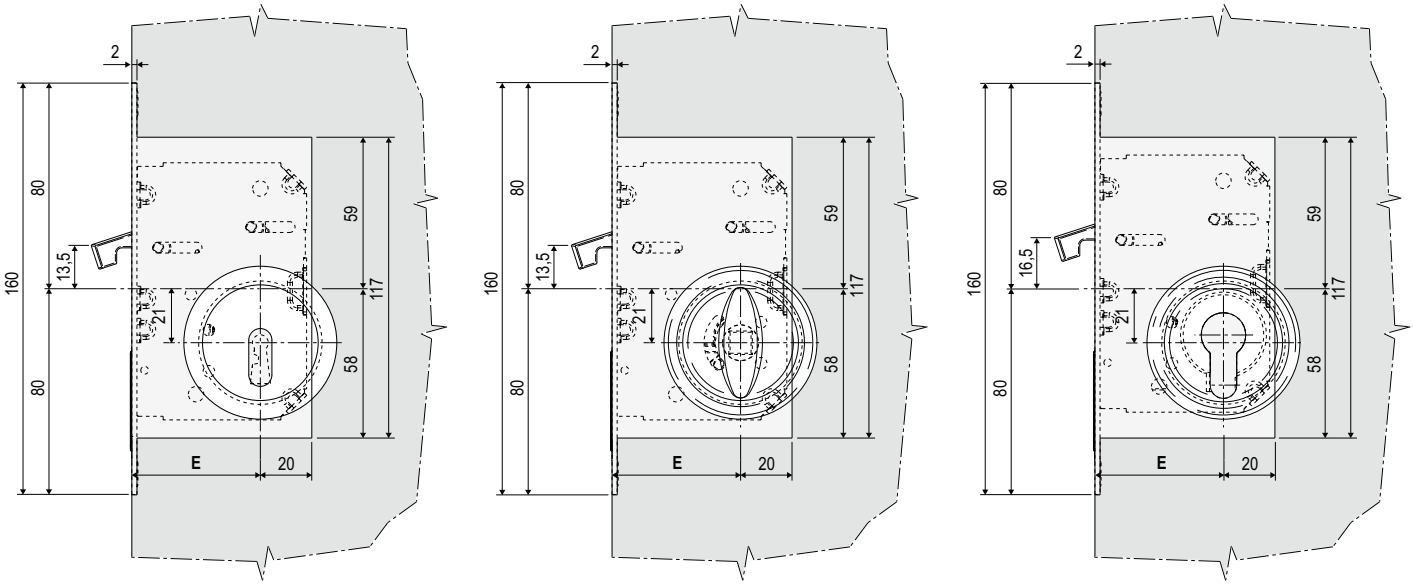
Three locks, one milling