

## Pull out lever Class




### Use

To make the sash sliding, use the pull out lever. The ergonomic grip allows to overpass the resistance of the systems regarding the brake of sliding doors.

### Fastening

Necessary screw 4x20 mm, additional second screw is optional (screws are not included in the package).

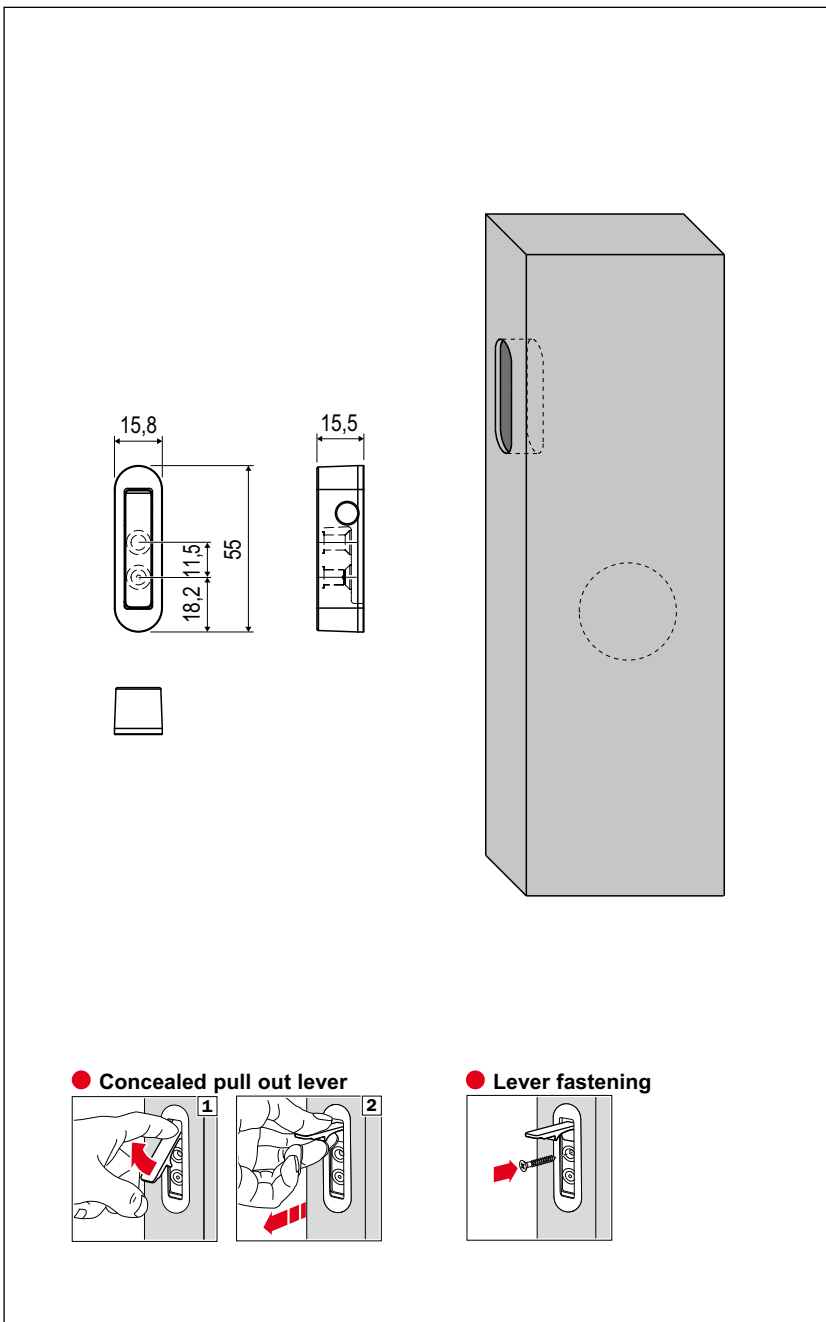

### Order Specifications

	Article	
	B08986.00.XX	

**Note.** Refer to the price list in force to check the availability of the finishes.