



Mod. 1685 - 85 mm centre with roller cams

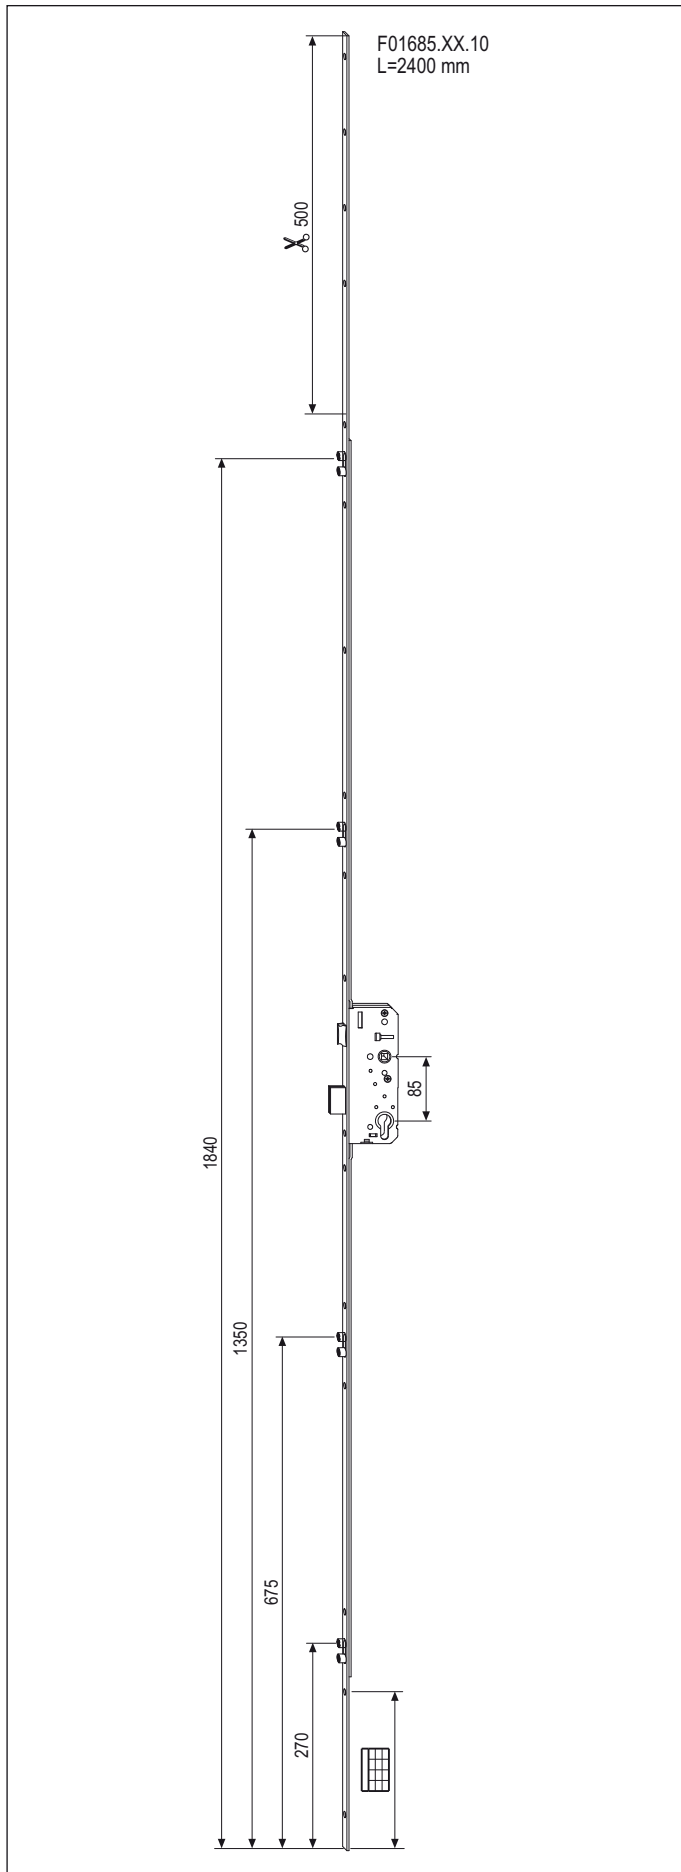

Application

For single-sash rebated exterior doors.

- Locking points
- 4 roller-head roller cams
 - spring latch
 - central bolt.

Operation

Locks and unlocks with just two complete turns of the key. A gear drive mechanism made of pressed steel drives the roller cams and central bolt. The spring latch can be retracted either with the handle or the key: a fixed knob can therefore be mounted on outside of door.

Technical characteristics

- Reversible steel spring latch, bevelled and rounded on both sides to reduce friction.
- Central bolt made of pressed steel plates
- Locking cams with revolving brass jacket
- European profile cylinder hole
- Holes for fitting handleplate, escutcheon and pull using through screws
- Cylinder fastening screw supplied with kit
- *The lock is available also in the version with roller-type spring latch (to be ordered with version code 210: W0XXXX.XX.XX.210)*

- Measurements
- Centre: 85 mm
 - Backsets: 35 to 70 mm
 - Forend width: 16 and 20 mm
 - Forend height: 2400 mm
 - Handle height: 1050 mm
 - Trim: upper 500 mm, lower 180 mm
 - Total roller cam stroke: 20 mm downstroke to lock
 - Eccentric roller cam adjustment: ± 1 mm
 - ± 4 mm vertical adjustment
 - Brass hub: 8 mm

Screw hole position

GR	A-B ref.															
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°
10	45	207	313	612	718	900	1151	1287	1393	1585	1777	1883	2070	2170	2270	2370

Order Specifications

Article			Forend	Forend height	Forend width	Forend depth
COD	E	GR				
W01685	XX	10	16	1900-2400	2400	4
W02085	XX	10	20	1900-2400	2400	4

Backsets (XX) = 35-40-45-50-55-60-70

Central locking point with roller-type spring latch (available for all backsets)

W01685.XX.XX.210	210 product variation
------------------	-----------------------