



Mod. 457 - 85 mm centre with roller cams

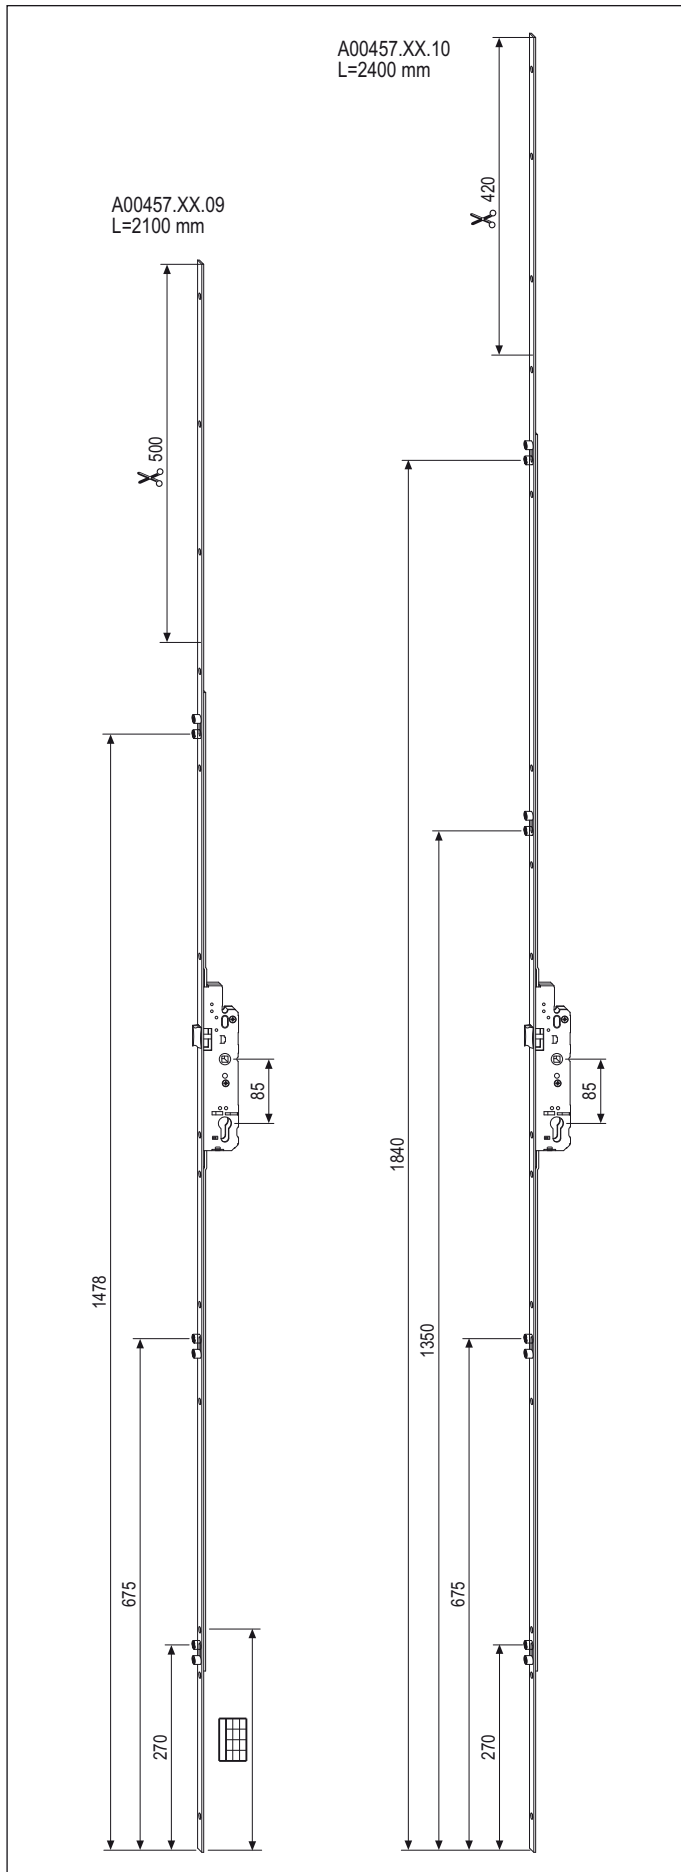

Application

For single-sash rebated balcony doors.

Locking points:

- 3 roller-head roller cams (L=2100 mm) or 4 roller-head roller cams (L=2400 mm)
- spring latch

Operation

To close: lift the handle to engage the roller cams; turn the key to lock.

To open: turn the key to unlock; lower the handle to disengage the roller cams and retract the spring latch.

Technical characteristics

- Total roller cam stroke: 16 mm. Locking movement: bottom cams with downstroke, upper cams with upstroke
- Eccentric roller cam adjustment: ± 1 mm
- 8 mm pressed steel hub
- Bichromated finish in compliance with UNI-ISO 2081
- Reversible steel spring latch, bevelled and rounded to reduce friction.
- Locking cams with revolving brass jacket
- Extending movement of rods with reverse mechanism incorporated in the lock.
- European profile cylinder hole with fastening screw supplied with the lock. Holes for fitting handleplate, escutcheon and pull using through screws with backsets greater than 35 mm.

- Measurements:
- Centre: 85 mm
 - Backsets: 25 to 55 mm
 - Forend width: 16 mm
 - Forend height: L=2100 and 2400 mm
 - Handle height: 1050 mm
 - Max upper trim: 500 mm (L=2100 mm); 420 mm (L=2400 mm).

Screw hole position

GR	A-B ref.													
	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°
9	45	231	291	593	721	894	1182	1431	1559	1717	1886	2055		
10	45	231	291	593	721	894	1182	1383	1431	1793	1958	2078	2240	2355

Order Specifications

Article			A-B ref.	E	GR
COD	E	GR			
A40457	XX	09	1600-2100	2100	3
A40457	XX	10	1980-2400	2400	4

Backsets (XX) = 25-30-35-40-45-50-55