



# Eclipse 4.1 - adjustable concealed hinge for flush doors in wood and aluminium, with surface mounted coverplate

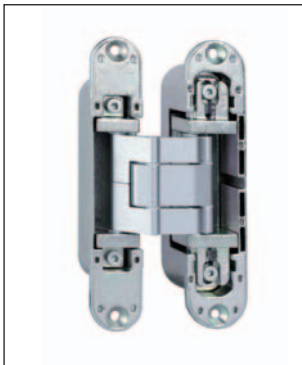

### Description

Reversible concealed hinge. It is adjustable on 3 axis and allows a 180° door opening. It is suitable for flush doors with thickness higher or equal to 44 mm. Ideal for applications with cover up to 13 mm.




### Capacity

70 kg with 2 hinges.

**Note.** Follow the procedure on the capacity diagram for the sash maximum possible dimensions in relation of the number of hinges.

### Fastening

Mill the sash and frame parts as indicated in the drawing and fasten the hinge with  $\varnothing 4,5$  mm screws of suitable length.

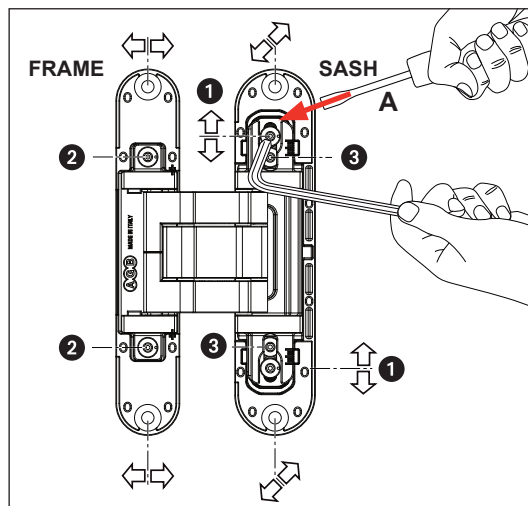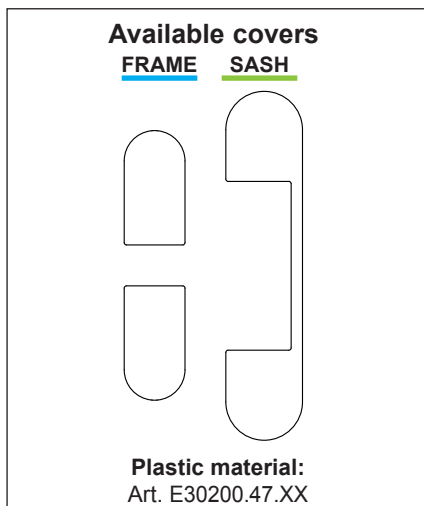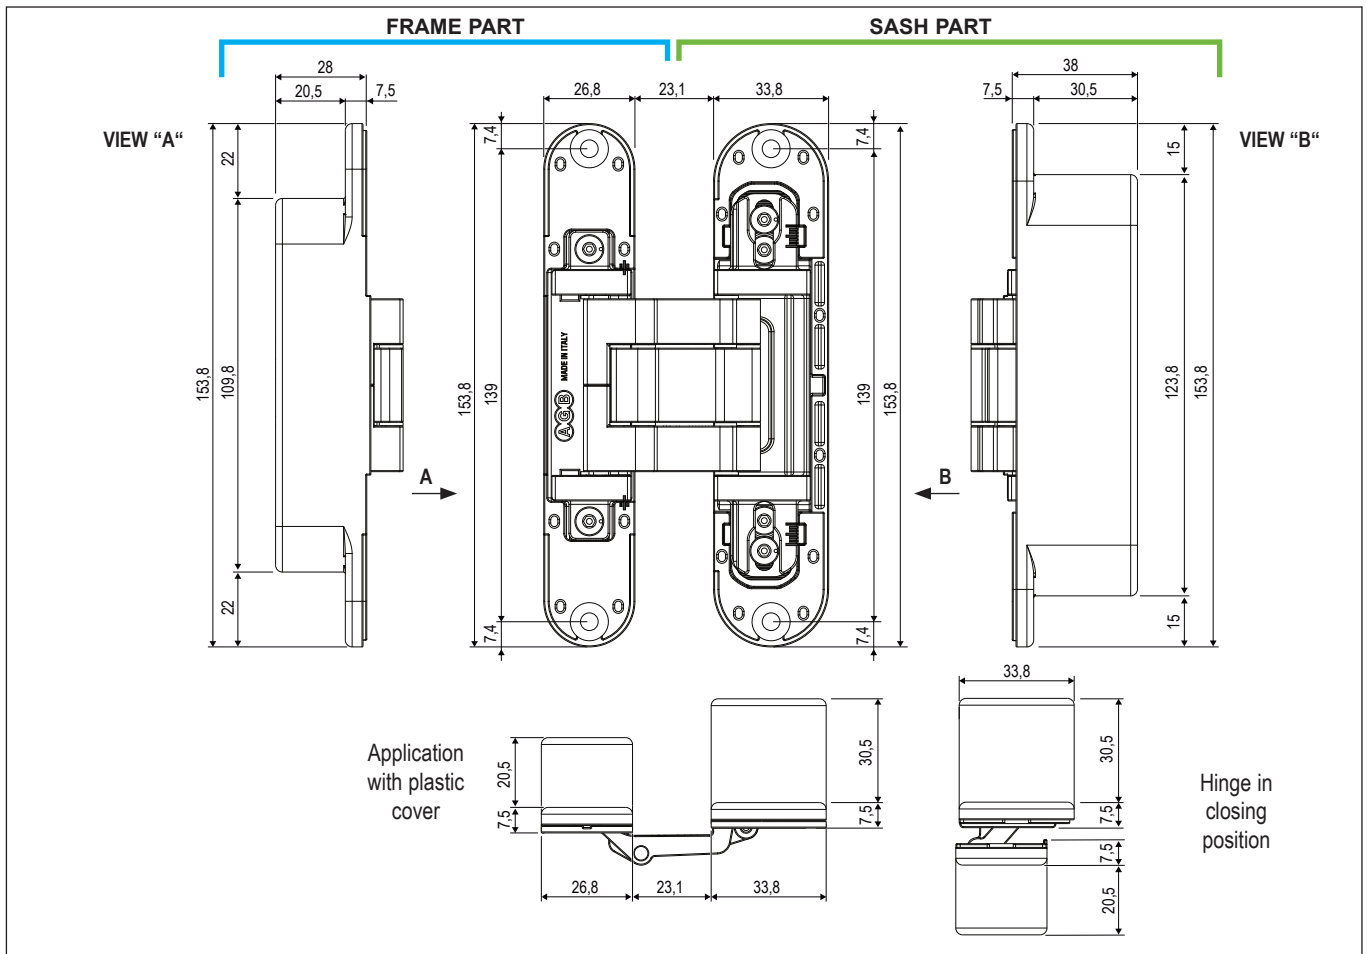

### Adjustments

Please adjust the hinges one by one with a 3 mm Allen key; reach the desired adjustment on the screws alternatively and with little movements.

- **±3 mm vertical adjustment:** loosen the screws ① by using a screwdriver (A) or a wedge which is suitable for Eclipse hinges, art. E30200.89.01. After this operation, fasten the screws.
- **±1 mm pressure adjustment:** loosen the screws ② and move the hinge body. After this operation, fasten the screws.
- **+3/-2 mm horizontal adjustment:** move the screws ③.

# Eclipse 4.1 - adjustable concealed hinge for flush doors in wood and aluminium, with surface mounted coverplate

