

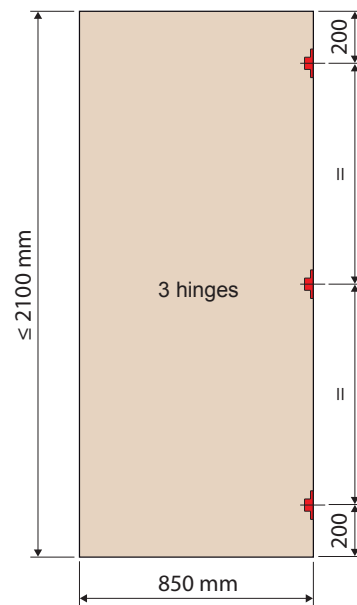
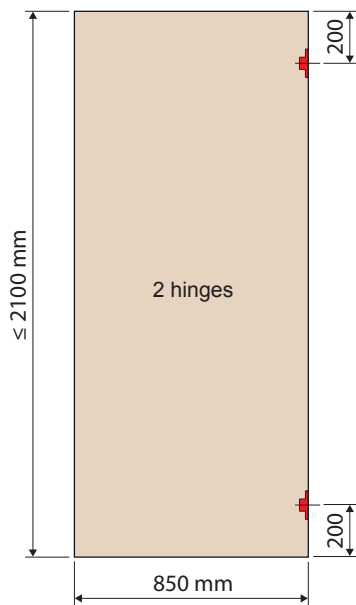


Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors

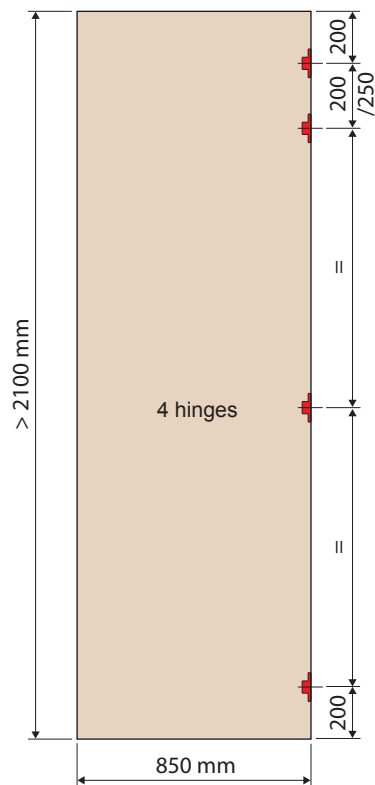

**Note.** Two hinges capacity is 40 kg and three hinges capacity is 60 kg, in any case if the door is higher than 1600 mm we suggest you a third hinge in the central position to reduce deformations. For the number of hinges to use, please make reference to the application fields at [www.agb.it](http://www.agb.it).

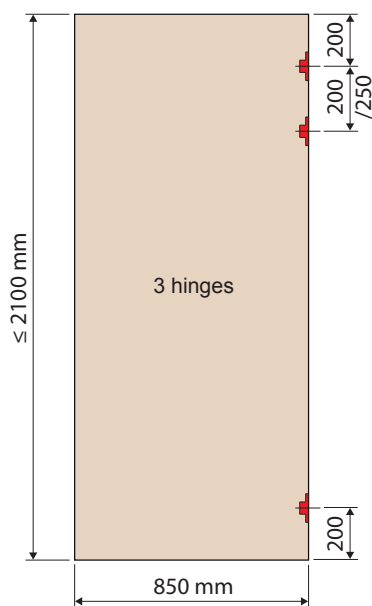

**Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors**

Sash weight = 12 kg/m<sup>2</sup>

Thickness of the glass: 5 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2	2	2								
700	2	2	2	2	2	2	2	2	2	2						
800	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
900	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1000	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1100	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1200	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3
1300	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3
1400	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3
1500	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1600	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1700	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1800	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
1900	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2000	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2100	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2200	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2300	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2400	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2500	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2600	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2700	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
2800	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3

Sash weight = 15 kg/m<sup>2</sup>

Thickness of the glass: 6 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2	2	2										
700	2	2	2	2	2	2	2	2								
800	2	2	2	2	2	2	2	2	2	3	3	3	3			
900	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	
1000	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
1100	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
1200	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
1300	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1400	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1500	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1600	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
1700	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
1800	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
1900	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2000	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2100	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2200	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2300	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2400	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3
2500	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3
2600	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3
2700	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2800	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3

**Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors**

Sash weight = 20 kg/m<sup>2</sup>

Thickness of the glass: 8 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2	2												
700	2	2	2	2	2	2										
800	2	2	2	2	2	2	2	3	3	3						
900	2	2	2	2	2	2	2	2	3	3	3	3				
1000	2	2	2	2	2	2	2	2	3	3	3	3				
1100	2	2	2	2	2	2	2	2	2	3	3	3	3			
1200	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4
1300	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
1400	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
1500	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4
1600	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	4
1700	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4
1800	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4
1900	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	4
2000	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2100	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
2200	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
2300	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3
2400	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3
2500	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4
2600	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4
2700	2	2	2	2	2	2	3	3	3	3	3	3	3	3	4	4
2800	2	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4

Sash weight = 25 kg/m<sup>2</sup>

Thickness of the glass: 10 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2													
700	2	2	2	2												
800	2	2	2	2	2	3	3	3								
900	2	2	2	2	2	2	3	3	3							
1000	2	2	2	2	2	2	2	3	3	3						
1100	2	2	2	2	2	2	2	3	3	3	3					
1200	2	2	2	2	2	2	2	2	3	3	3	4	4	4	4	
1300	2	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4
1400	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1500	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1600	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4
1700	2	2	2	2	2	2	2	2	2	3	3	3	4	4	4	4
1800	2	2	2	2	2	2	2	2	2	3	3	3	3	4	4	4
1900	2	2	2	2	2	2	2	2	3	3	3	3	3	4	4	4
2000	2	2	2	2	2	2	2	3	3	3	3	3	3	4	4	4
2100	2	2	2	2	2	2	2	3	3	3	3	3	3	4	4	4
2200	2	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4
2300	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4
2400	2	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4
2500	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4	4
2600	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4
2700	2	2	2	2	3	3	3	3	3	4	4	4	4	4	4	
2800	2	2	2	3	3	3	3	3	3	4	4	4	4	4		

**Positioning and application fields of the adjustable hinge Eclipse, Eclipse 2.0, Eclipse 3.0, Eclipse 3.1, Eclipse 3.2, Eclipse 3.3 and Eclipse 3.4 for flush doors**

Sash weight = 30 kg/m<sup>2</sup>

Thickness of the glass: 12 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2	2													
700	2	2	2													
800	2	2	2	2	3	3	3									
900	2	2	2	2	2	3	3	3								
1000	2	2	2	2	2	3	3	3								
1100	2	2	2	2	2	2	3	3	3							
1200	2	2	2	2	2	2	3	3	3	4	4	4	4			
1300	2	2	2	2	2	2	3	3	3	3	4	4	4	4		
1400	2	2	2	2	2	2	2	3	3	3	4	4	4	4		
1500	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4	
1600	2	2	2	2	2	2	2	3	3	3	4	4	4	4	4	
1700	2	2	2	2	2	2	2	3	3	3	3	4	4	4	4	
1800	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
1900	2	2	2	2	2	2	3	3	3	3	3	4	4	4	4	4
2000	2	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4
2100	2	2	2	2	3	3	3	3	3	3	3	4	4	4	4	4
2200	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4
2300	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	
2400	2	2	2	3	3	3	3	3	4	4	4	4	4	4		
2500	2	2	2	3	3	3	3	4	4	4	4	4	4			
2600	2	2	2	3	3	3	3	4	4	4	4	4				
2700	2	2	3	3	3	3	4	4	4	4	4					
2800	2	2	3	3	3	3	4	4	4	4	4					

Sash weight = 35 kg/m<sup>2</sup>

Thickness of the glass: 14 mm (total)

DIMENSIONS																
SRH (height) (mm)	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
600	2	2														
700	2	2	2													
800	2	2	2	3	3	3										
900	2	2	2	2	3	3	3									
1000	2	2	2	2	3	3	3									
1100	2	2	2	2	2	3	3	3								
1200	2	2	2	2	2	3	3	3	4	4	4	4				
1300	2	2	2	2	2	3	3	3	4	4	4	4				
1400	2	2	2	2	2	3	3	3	3	4	4	4	4			
1500	2	2	2	2	2	2	3	3	3	4	4	4	4	4		
1600	2	2	2	2	2	2	3	3	3	4	4	4	4	4		
1700	2	2	2	2	2	2	3	3	3	4	4	4	4	4	4	
1800	2	2	2	2	3	3	3	3	3	4	4	4	4	4	4	
1900	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4	
2000	2	2	2	3	3	3	3	3	3	4	4	4	4	4	4	
2100	2	2	2	3	3	3	3	3	4	4	4	4	4	4		
2200	2	2	2	3	3	3	3	4	4	4	4	4				
2300	2	2	3	3	3	3	4	4	4	4	4					
2400	2	2	3	3	3	3	4	4	4	4	4					
2500	2	2	3	3	3	4	4	4	4	4						
2600	2	2	3	3	3	4	4	4	4							
2700	2	2	3	3	4	4	4	4								
2800	2	2	3	3	4	4	4	4								