


LAS1010, LAS1212, LAS1015 BATWING® FITTING GUIDE

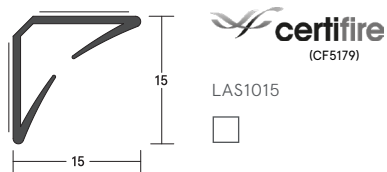

CONTENTS

- LAS1010 Batwing®, LAS1212 Batwing® or LAS1015 Batwing®

TOOLS REQUIRED

- Tape measure
- Pencil or marker
- Mitre saw or snips

IMPORTANT INFORMATION

This product must be installed to allow the proper opening and closing of the door assembly with a minimal amount of force. The door assembly should be checked periodically to insure proper operation.

This product has been designed to provide an effective smoke seal in the gap around a fire-rated door.

This product is to be installed as illustrated, around the perimeter of the door assembly.

Care should be taken to install this product without stretching or damaging it in any way. The temperature of the frame should be above 5°C. The frame should be thoroughly cleaned removing dust, oil, grease or dirt. Certain paint products may make adhesion difficult. If necessary, lightly sand the painted surface and then thoroughly clean. **Secure adhesion is crucial to the proper performance of this product!**

STEP 1

Measure the frame at the top and both sides.

STEP 2

Cut the product to fit using a knife or scissors, mitring the top corners.

STEP 3

Remove both pieces of protective backing one foot at a time.

STEP 4

Adhere seal to the exact location on frame where section is to be installed.

Do not remove and relocate.

STEP 5

Inspect seal to assure proper location.

STEP 6

Do not install this product to impede the opening and closing of the door assembly. The door assembly must operate effectively.



NOTE

Ensure that the installation of this product does not impede the opening or closing of the door. It is recommended to check the door seal periodically to ensure the door assembly to which it is fitted, closes and latches properly.

NOTE

Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers.

Lorient reserves the right to make alterations or delete any installation detail without prior notice.



Gasketing materials for fire doors intended for application to wood and plastic covered composite and wood core doors rated up to 1.5 hours. Listed steel frames and/or classified steel covered composite, hollow metal doors rated up to 3 hours.

V1



Lorient Polyproducts Ltd
Endeavour House
Fairfax Road
Heathfield Ind Estate
Newton Abbot
Devon TQ12 6UD
United Kingdom

+44 (0)1626 834252
www.lorientgroup.com

All rights reserved. No part of this fitting guide may be reproduced, stored in a retrieval system, or transmitted in any means, electronic, mechanical, photocopying, recording or otherwise without the written permission of Lorient Polyproducts Limited.
© Lorient Polyproducts Ltd 2019