



Mod. 5000 PS, half cylinders 8 positions

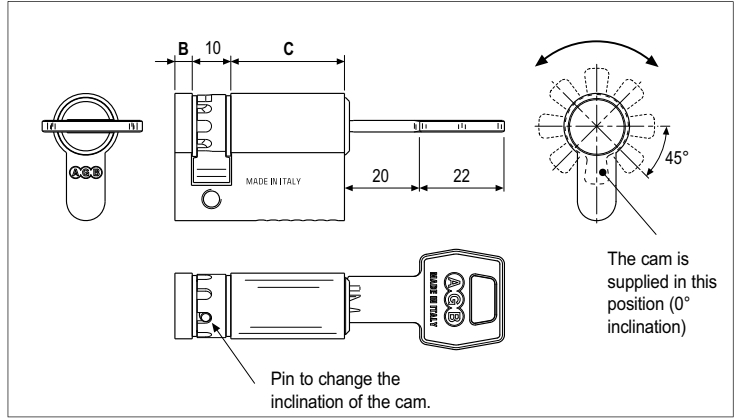

Characteristics

- Nickel plated security half cylinder, it can be used with locks and devices which require different cam inclination than the standard one (15°).
- Designed on the basis of the sixth intrinsic security class according with the regulation EN 1303.
- 3 hardened steel anti-drill pins on each side. **1**
- 6 active pins **2** and 9 passive pins **3** for a wide range of coding.
- Steel cam supplied with 0° inclination. By pushing the pin indicated in the drawing, you can adjust the cam on 8 different positions, multiple of 45°. **5**
- High-resistance to the bumping certified according with ICIM. **5**
- 5 flat reversible keys with longer neck compatible with protective rim guards. **6**
- Grip can be personalised with different coloured covers. **7**
- Nickel plated fastening screw, M5x76 mm.

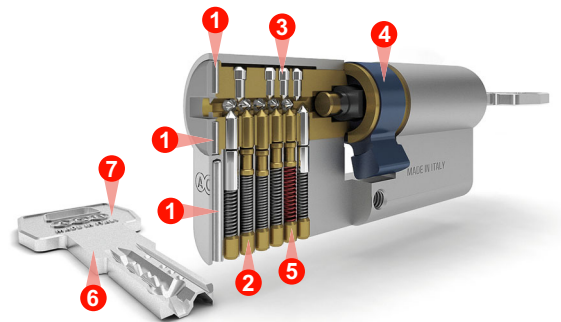

Note. The image is indicative only.

Cylinder classification



EN 1303:2015 - ICIM 0039CS								
1	6	0	B	0	C	6	0	

ANTI-PICKING: Pass
 ANTI-BUMPING: Level 2

Note. The product certifications ICIM are available at the website www.agb.it

Note. For further information, see the introduction called "Comparative table of cylinders according with the regulations EN 1303 and EN 1627" in the cylinders technical catalogue.

Cylinder choice guide

Antiburglar						
Systems						
Durability						
Finish						

Note. For further information, see the introduction called "Cylinder choice guide" in the cylinders technical catalogue.

Matt nickel plated brass

Article	Pins	B	C
CA6016.05.XX	15	05	XX

Note. Refer to the price list in force to check the availability of measures and special finishes on demand.